




myUTN-2500 USB Deviceserver: The Business Solution For USB Independence

The myUTN-2500 Deviceserver integrates almost every USB device into all common network types—the fast and easy way.

The myUTN-2500 USB Deviceserver is a "plug&play" solution: Once the device is embedded into the network, you can manage the connected USB devices transparently via


the associated software SEH UTN Manager—just as if the USB devices were locally connected to the client (point-to-point connection).

Access your USB devices flexibly and comfortably via the network—-independent of location and of USB cable lengths!

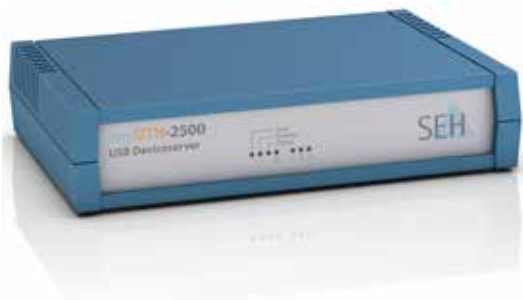

myUTN-2500 USB Deviceserver

- ✓ High performance device with 3 USB 3.0 SuperSpeed ports
- ✓ For Windows, OS X/macOS and Linux
- ✓ Data transfer at top speed:



High Performance and Security for the Professional User


3 USB 3.0 SuperSpeed USB ports guarantee the fastest transmission of USB data. In addition, one of these ports can be used for charging USB devices (CDP—Charging Downstream Protocol).

The comprehensive security package containing many meshed security features protects the myUTN-2500 Deviceserver as well as the connected USB devices. Benefit from features such as encrypted connections, certificate management, device access control, authentication, and many more!

The myUTN-2500 Deviceserver also is the ideal solution for virtualized network environments such as Citrix, VMWare or HyperV.

Benefits

- Virtual USB cable extension via the network for the flexible and location-independent utilization of USB devices
- For Windows, OS X/macOS and Linux
- Top compatibility with USB devices
- Rapid data transmission with USB 3.0 SuperSpeed

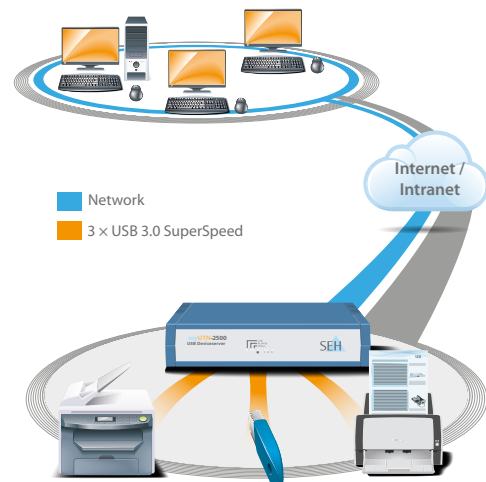

- Cost savings: no need to purchase multiple USB devices because users can share USB devices consecutively
- Simple administration, configuration, and maintenance via your web browser

Features

- 3 x USB 3.0 SuperSpeed Ports
 - USB port 3 as charging port (e.g. for mobile devices)
- Gigabit Ethernet (10BaseT/100BaseTX/1000BaseT)
- VLAN capable (802.1Q)
- Comprehensive security package: encryption, password protection, certificate management, authentication (802.1X), and much more!
- Regular software updates, technical support worldwide for free
- Up to 5 years of guarantee

Fields of Application

- Use a great variety of USB devices with control and flexibility via the network, such as external hard disks, flash drives, scanners, gauges, medical equipment, RDX removable disks, multifunction peripherals, cameras, telephone systems, and many more.
- Ideal for server-based environments (Citrix XenApp and Microsoft Remote Desktop Services/Terminal Services) and virtualized environments (VMWare, Citrix Xen or Microsoft Hyper-V)

myUTN-2500 USB Deviceserver

TECHNICAL SPECIFICATIONS

Interfaces and Network Connectors

- 10BaseT/100BaseTX/1000BaseT
- 3 × USB 3.0 ports (SuperSpeed); thereof 1 × charging port (CDP-Charging Downstream Port)
 - 1 connected USB device: up to 100 MB/s
 - 3 connected USB devices: 30 MB/s per port

Configuration and Management

- SEH UTN Manager (connection management tool) for:
 - Microsoft Windows (32/64-bit; Windows 10 or higher, Server 2012 R2 or higher)
 - macOS 10.9 or higher*
 - Linux (Debian 10, Ubuntu 18.04, Red Hat Enterprise Linux 8, Oracle 8, CentOS 8, SUSE Linux Enterprise 15.1, openSUSE Leap 15.1)**
- SEH Product Manager (network device management)
 - for:
 - Microsoft Windows (32/64-bit; Windows 10 or higher, Server 2012 R2 or higher)
 - macOS (10.12.x or higher)
- myUTN Control Center (configuration, administration, monitoring, and maintenance via browser)
- Email, SNMP, Bonjour

Supported Protocols

- TCP/IP:
DHCP, BOOTP, ARP, TCP, UDP, ICMP, IGMP, TFTP, HTTP/HTTPS, Zeroconf, DNS, SLP, SNMP MIB-2 compatible, SNMPv1, SNMPv3, SMTP, POP3, SSL/TLS, Bonjour, etc.

Security

- Encryption: SSL 3.0, TLS 1.0/1.1/1.2, HTTPS
- Authentication: 802.1X (EAP-MD5, EAP-TLS, EAP-FAST, EAP-TTLS, PEAP)
- Certificate management: self-signed certificate, certificate request, CA certificate, PKCS#12 certificate, S/MIME certificate
- SNMPv3
- TCP port access control
- Device access control (password protection, session login)
- USB HID class blocking
- Port key control
- Notification service
- USB port deactivation
- VLAN (802.1Q)

Supported Languages

- English, German, French, Spanish, Italian, Portuguese, Japanese, Korean, Chinese (traditional and simplified)

Tests (Notifications)

- CE: EN55022:2010 class B, EN55024:2010, EN50581:2012
- FCC: class B
- RoHS

Power Supply

- External power supply
 - Output: 12 V, 2.5 A
 - Input: 100–240 V ~

Operating Environment

- Temperature: 5–40 °C
- Relative humidity: 20–80 %

Dimensions (Width, Height, Depth)

- 140 × 32 × 99 mm

Weight

- 160 g

Current Input


- approx. 200 mA @ 12 VDC (without load)
- approx. 2400 mA @ 12 VDC (with full load on the USB ports)

Power Consumption

- approx. 26 kWh/year

Order Numbers

- M05080 (EU)
- M05081 (UK)
- M05082 (US)
- M05083 (JP)



* only limited support available for USB devices on macOS 11.x (Big Sur) systems; does not run on Apple Silicon (Apple M1 chip) based Mac computers

** A successful installation cannot be guaranteed due to the multitude of Linux distributions! Install at your own responsibility



SEH Computertechnik GmbH

Suedring 11
33647 Bielefeld
Germany

<http://www.seh-technology.com/products/usb-deviceserver/myutn-2500.html>

Telefon +49 (0) 5 21 9 42 26-29
Fax +49 (0) 5 21 9 42 26-99
Support +49 (0) 5 21 9 42 26-44
Internet www.seh.de
E-Mail info@seh.de

Made
in
Germany